

VZ-3 Desktop Visualizer

Innovation in
presentation



Unique Design Concept

VZ-3 Desktop Visualizer



WolfVision is a globally successful family owned company based in Austria/Europe. As 'technology leader' in the Visualizer market, WolfVision is the company that sets the worldwide standards of product quality, innovation, reliability and ease of use.

WolfVision's entry level VZ-3 Visualizer includes all the basic features that every user requires and provides the same high quality imaging, ease of use and reliability as can be seen throughout the entire WolfVision product line.


The Visualizer VZ-3 features a unique new eye-catching design concept where the camera, light system and electronic hardware are integrated into the Visualizer arm.

More detailed feature descriptions,
photos and 3D animation at

www.wolfvision.com

Long Lifetime

Schools and companies appreciate the exceptional mechanical quality and solid design of WolfVision Visualizers. They are built to last for a very long time.

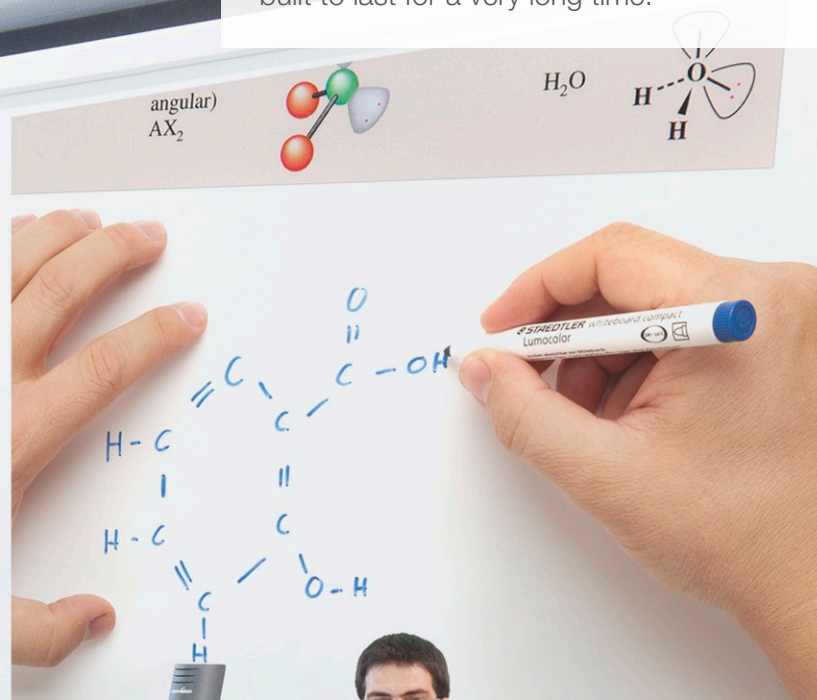

Outstanding Picture Quality

WolfVision Visualizers have always been famous for their outstanding picture quality, which is due to a perfect mix of high end components and remarkable know-how. Perfect picture quality means high resolution throughout the whole picture (including the edges). It means lifelike colours, a high frame rate, fast and precise auto focus, smooth zooming, an overall distortion free picture, even lighting without reflections or hot spots and much more.

WolfVision's high priority on perfect picture quality can be seen throughout the entire Visualizer product line - from entry level models right through to the top of the range units. The picture quality of a Visualizer or camera can only be as good as it's weakest component. Five basic elements are responsible for perfect picture quality:

Camera Lens

A large high precision premium quality lens creates a better image than a small low price lens



Image Sensor (CCD)

A high resolution 1-CCD image sensor ensures the capture of high quality image data



Electronic Hardware

High end components deliver high performance, stability and reliability



Software (Firmware)

Sophisticated software maximises hardware potential to guarantee excellent picture quality



LED Light System

A high-brightness LED with low power consumption provides smooth and consistent lighting for accurate colour reproduction



Main Features

Large Zoom Range

A large optical zoom range is one of the most important features of a Visualizer, because only an optical zoom can pick up objects in full resolution.

WolfVision's 12x optical zoom offers the possibility to pick up objects as large as an open book (300 x 400mm / 11.81" x 15.75") and as small as a postage stamp (33 x 25mm / 1.3" x 1") in full size to fill the screen. For enlarging even smaller objects down to 17 x 13mm (0.7" x 0.5") the Visualizer also offers 2x digital zoom.

High Resolution Camera

WolfVision's VZ-3 Visualizer features a high definition 1-CCD camera with 30 frames per second and sRGB color precision. It can output native resolutions in SXGA-, WXGA, and 720p HD formats.

All current projectors, monitors or plasma displays on the market can display at least one of these output standards. Smoothness of motion is guaranteed as all WolfVision Visualizer models can pick up 30 pictures (frames) per second in every resolution.

Easy To Use / Zoom Wheel

For smooth presentations, it is very important that a Visualizer is extremely easy to use. Less experienced users only need to use the zoom wheel on top of the arm as everything else is adjusted automatically.

The autofocus works continuously to ensure that the presenter never needs to worry about focusing.

Advanced Keystone Correction

The slightly inclined recording angle of the Visualizer causes a minor keystone effect in the picture which is automatically corrected by the Visualizer's "Keystone Correction". It works very precisely and in real time - completely invisible to the user.

No Light Adjustments Necessary


The light system is optimized for the working surface, so there is never any need to make any light adjustments.

Dry-Erase Working Surface

The VZ-3 Visualizer comes with a dry-erase working surface. A speaker can write directly onto the working surface during a presentation, enabling the Visualizer to be used spontaneously as a whiteboard or "digital flip chart."

Anti-theft Devices

The Visualizer has two anti-theft devices. There is a thread on the bottom of the working plate for attaching the unit to a table with the supplied table lock bolt. Additionally, T-Lock (Kensington® Lock) devices can also be used.

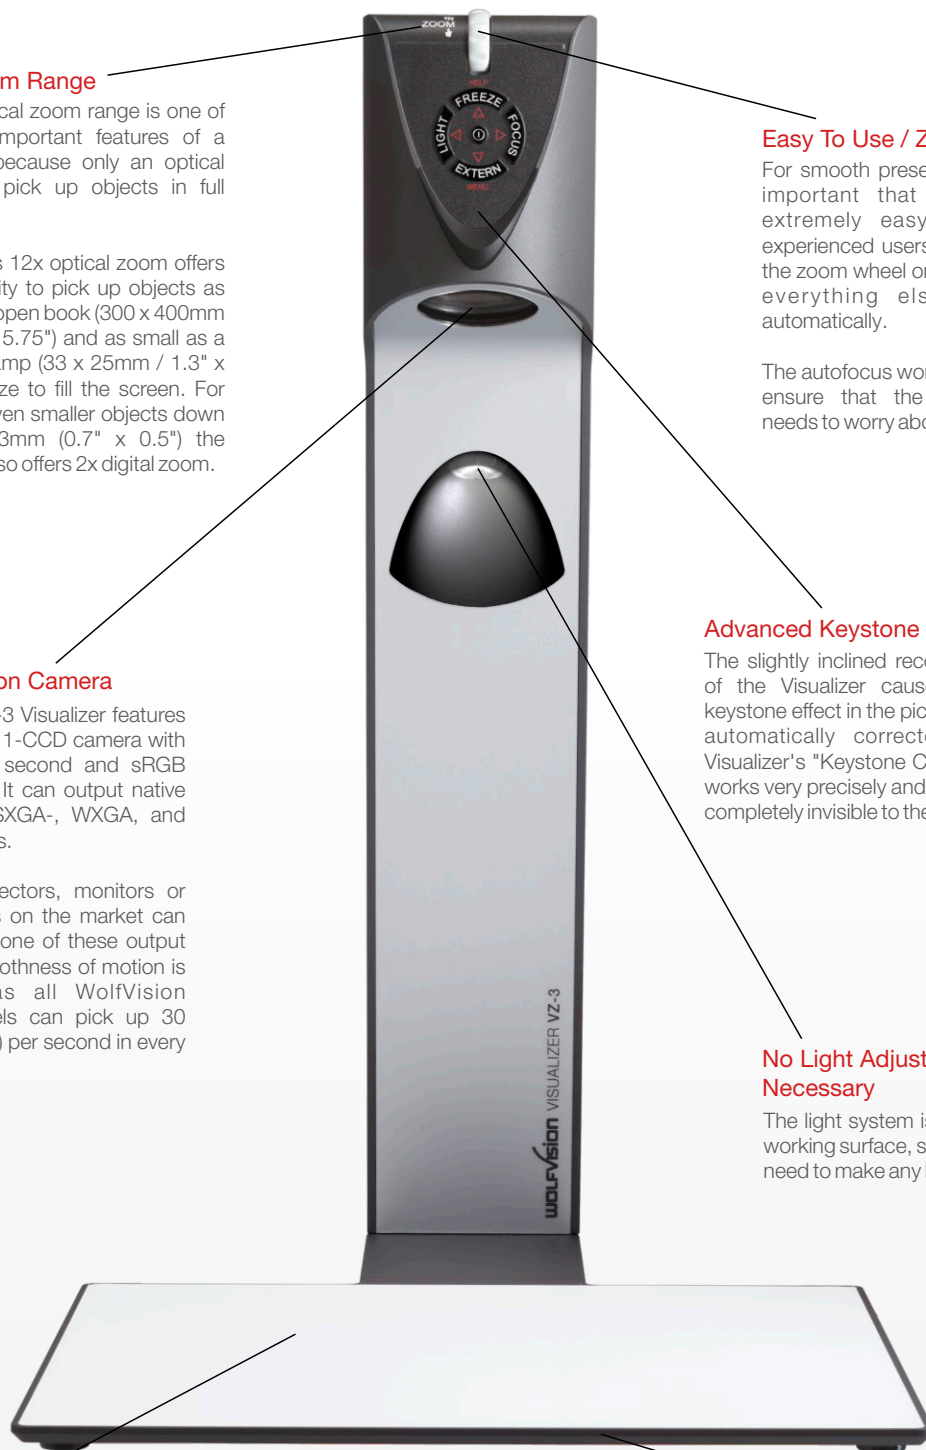

Additional Features



Flexible Installation Options

The innovative design of the VZ-3 brings a unique flexibility to Visualizer installation. The highly compact and portable unit can easily be used to serve a number of different rooms, or alternatively it can be used as a fixed installation without a working surface.

This additional possibility to remove the working surface is useful if there are space restrictions. It gives an additional option if the VZ-3 is required to fit into a particular room design, and it is the ideal solution if the unit is to be installed on a podium.



High Brightness LED Light System

The light system has an extremely long lifetime of 30,000 hours, which can be considered as maintenance free for most installations. The light of the Visualizer is focused on the

working surface. Neither the speaker nor the audience will be blinded in a darkened room, and there is no stray light from the Visualizer on the projection screen.



Outstanding Mechanical Stability and Long Lifetime

Outstanding mechanical quality and durability are basic requirements for all WolfVision products. WolfVision units are solid and not easily damaged. They are built to last for a very long time. If you want to check

out the difference in mechanical stability and reliability between a WolfVision Visualizer and any other document camera on the market, just 'touch' the units. You will immediately 'feel' the difference.

Connectivity Options

USB Device Port/Connectivity Software

The Visualizer can be connected to a computer using the fast USB 2.0 port together with the WolfVision Connectivity Software or a WIA, Twain or video capture driver. The supplied Connectivity 2 Software allows for saving still

images and videos onto a PC or Mac, controlling the unit, updating the firmware, adding annotations, instant printing of screenshots and even streaming live images over a network.



External Controlling

The VZ-3 Visualizer can be controlled from external devices, such as a room control system, a videoconferencing system or a computer via USB and LAN connections. Older devices with Serial RS232 port can be

connected using a Serial-LAN or Serial-USB adapter from other manufacturers. The functionality of the VZ-3 LAN port is limited to controlling and Firmware updates.



Computer Input

During a presentation, the External key of the Visualizer can be used to switch between Visualizer images and computer images from a PC that is connected to

the external input of the Visualizer. There is no need to use a separate remote control from a projector or monitor in order to switch image sources.



Firmware Updates

Firmware updates allow new features and technical improvements to be added at no cost! Downloading firmware updates from the internet and uploading them onto a Visualizer can be completed in 2-3 minutes, using the latest version of WolfVision's

Connectivity Software. Firmware updates can be made using the LAN or USB port of the Visualizer. WolfVision engineers are constantly working on new features and improvements to keep your units up to date with the technology of tomorrow.



More detailed feature descriptions, photos and 3D animation at

www.wolfvision.com

Technical Data

| | VZ-3 |
|--|--|
| Technology | Progressive Scan |
| Camera | 1-CCD 1/3" |
| Pictures per second (as picked up by the camera) | 30 frames (in all resolutions) |
| Effective Pixel (=pixels actually used for image information) | 1280 x 960 (=1,228,800) |
| Total pixels of CCD(s) | 1,320,000 |
| Pixels processed per second (=effective pixels x frames per second) | 36,864,000 |
| Color reproduction / precision | very good colors (sRGB color precision) |
| Native signal output | SXGA- (1280x960), WXGA (1280x800) and 720p HD (1280x720) |
| Converted output signals (4:3 and 5:4) | XGA (1024x768) |
| Converted Widescreen output signals (16:9 and 16:10) | WXGA (1360x768) |
| Resolution (measured) | 710 lines |
| Iris | automatic (manual in on-screen menu) |
| White balance adjustment | automatic and manual |
| Autofocus / Speed | yes (continuously working, high speed) |
| Manual focus | yes |
| Shutter | auto, manual, flickerless |
| On screen menu and on screen help | yes |
| Firmware Updates via | USB, LAN |
| Zoom / Lens | 24 x zoom (12x optical + 2x digital), with 2-speed zoom wheel |
| Max object height on working surface | 60mm (2.4") in tele position 320mm (12.6") in wide position |
| Max. pick-up area on working surface | length: 300mm (11.81"), width: 400 mm (15.75") |
| Min. pick-up area on working surface (in full resolution, with optical zoom) | 33 x 25 mm (1.3" x 1") |
| Min. pick-up area on working surface (with digital zoom) | 17 x 13 mm (0.7" x 0.5") |
| Depth of focus on small object (42 x 33 mm) | 10mm (0.4") |
| Depth of focus on large object (360 x 270 mm) | 260mm (10.2") |
| Tilt range of camera | none |
| Blinding of audience or speaker | none |
| Light source | LED light system |
| Connectivity Software (USB/LAN, for controlling, image and video capturing and firmware updates) | included (for 32- and 64-bit Windows and Macintosh, Twain/WIA compatible, with video capture driver) |
| Reflection free area on working surface | whole working surface |
| Intelligent folding system | mechanical arm |
| User programmable presets | No |
| Special working surface for transparencies | yes |
| Slide pick-up | with optional lightbox |
| Bottom light | optional external lightboxes |
| External computer input / Input switch | yes (15-pin D-Sub/VGA plug) |
| Advanced keystone correction | yes |
| Image memory | 1 image freeze |
| Alternative Image display | text enhancer / negative image / negative-blue image / black and white image |
| RGB output | via DVI to VGA/RGB cable or adapter |
| DVI output | DVI-I (digital) |
| HDMI output | when using a DVI-HDMI cable |
| USB standard / port | Mini-USB 2.0 Device-Port |
| Ethernet/LAN port, IP-addressable | For controlling and firmware updates only |
| RS232 port | No (if required external LAN to RS232 or USB to RS232 adapters can be used) |
| Dimensions in operation (L x W x H) | 488mm x 305mm x 505mm (19.2" x 12" x 19.9") |
| Dimensions folded (L x W x H) | 560mm x 305mm x 135mm (22" x 12" x 5.3") |
| Weight | 3,5 kg (7.7 lbs) |
| Operating temperature / relative humidity | 0°-40°C (32°-104°F) / 40-60% |
| Anti-theft devices | T-Lock (Kensington® Lock) and table lock bolt |
| Power | External power pack: multi range 100-240 V, 25.5W, power consumption 19.2W, Power over Ethernet plus (IEEE 802.3at standard) |
| Warranty | 5 years |

All units made in the European Union (Austria)

The VZ-3 is only available in North America and Asia.

Design and specifications subject to change!

Your WolfVision dealer:

WOLFVISION®

www.wolfvision.com

Head Office:

WolfVision GmbH
6833 Klaus / Austria
Tel. ++43-5523-52250
wolfvision@wolfvision.com

Germany Sales Office
WolfVision GmbH
Tel. 0800-9828-787
wolfvision.deutschland@wolfvision.com

USA West Region Sales Office
WolfVision, Inc.
Tel. ++1-650-648-0002
sales@wolfvision.us

USA East Region Sales Office
WolfVision, Inc.
Tel. ++1-770-931-6802
sales@wolfvision.us

Asia Sales Office
WolfVision Asia
Tel. ++65-6366-9288
info@wolfvisionasia.com

Canada Sales Office
WolfVision Canada, Inc.
Tel. ++1-613-741-9898
wolfvision.canada@wolfvision.com

Japan Sales Office
WolfVision Co. Ltd.
Tel. ++81-3-33603231
wolfvision.japan@wolfvision.com

UK Sales Office
WolfVision UK Ltd.
Tel. ++44-161-435-6081
wolfvision.uk@wolfvision.com